

Solidigm™  
D7-PS1010  
D7-PS1030

PRODUCT BRIEF

# The Fastest PCIe 5.0 SSD on the Planet<sup>1</sup>

The Solidigm™ D7-PS1010 and D7-PS1030 are built to accelerate demanding modern enterprise and cloud data center workloads, and to power your AI/ML data pipeline.



Our extensive SSD portfolio expands into PCIe 5.0 with the Solidigm D7-PS1010 and D7-PS1030 drives, powerful additions to the high performance D7 series. These drives provide standard endurance and mid-endurance, respectively, across a range of capacities in the industry’s most popular form factors. Combining class-leading performance and performance optimizations for real-world IO conditions,<sup>2</sup> the Solidigm D7-PS1010 and D7-PS1030 efficiently accelerate a wide range of enterprise, cloud, and AI/ML workloads, regardless of PCIe interface. Designed and tested with zero tolerance for data errors<sup>3</sup> and consistent performance across the life of the drive,<sup>4</sup> they can be deployed with the utmost confidence.

Solidigm D7-PS1010 and Solidigm D7-PS1030 capacities range from 1.92TB to 15.36TB and 1.6TB to 12.8TB, respectively. Both drives are available in E3.S and U.2 form factors.

Performance and Features at a Glance								
Product Name	Solidigm™ D7-PS1010				Solidigm™ D7-PS1030			
<b>Interface</b>	PCIe 5.0							
<b>Media</b>	176L TLC 3D NAND							
<b>User Capacity (TB)</b>	1.92	3.84	7.68	15.36	1.6	3.2	6.4	12.8
<b>Endurance Rating</b>	Standard Endurance (SE)				Mid-Endurance (ME)			
<b>Endurance (5-yr)</b>	1.0 DWPD				3.0 DWPD			
<b>Endurance (3-yr)</b>	1.66 DWPD				4.98 DWPD			
<b>Max Lifetime PBW (5-yr)</b>	28 PBW @ 15.36TB				70 PBW @ 12.8TB			
<b>Max Avg Active Read &amp; Write Power</b>	23W (PCIe 5.0 and 4.0)							
<b>Idle Power</b>	5W							
<b>MTBF</b>	↑ 2.5 Million Hours (25% higher than previous generation Solidigm drive)							
<b>UBER</b>	↑ Tested to 1E-18 (100x higher than JEDEC spec)							

	Target Workloads	Form Factors	Capacities (TB)	Endurance DWPD   Max PBW	
Solidigm™ D7-PS1030	Mixed and Write-centric	E3.S 7.5mm	1.6 — 12.8	3.0	70.0
		U.2 15mm	1.6 — 12.8		70.0
Solidigm™ D7-PS1010	Mixed and mainstream	E3.S 7.5mm	1.92 — 15.36	1.0	28.0
		U.2 15mm	1.92 — 15.36		28.0

JEDEC Workload

## Next-Gen Performance and Efficiency, Elevated: Gen/Gen Performance<sup>5</sup>

The next generation of high-performance SSDs has arrived. Experience significant improvements to performance, latency reduction, and QoS, including double the throughput, compared to the previous generation, the Solidigm™ D7-P5520 and D7-P5620.

Performance	Solidigm D7-PS1010	Solidigm D7-PS1030
<b>4K Random Read IOPS, QD256</b>	↑ 2.8x up to 3.1M	↑ 2.8x up to 3.1M
<b>4K Random Write IOPS, QD256</b>	↑ 1.8x up to 400K	↑ 2.1x up to 800K
<b>128K Seq. Read MB/s, QD128</b>	↑ 2.0x up to 14,500	↑ 2.0x up to 14,500
<b>128K Seq. Write MB/s, QD128</b>	↑ 2.3x up to 10,000	↑ 2.3x up to 10,000

## PCIe 5.0 Leadership

Having immediate access to data has never been more important. **Class-leading performance** improvements, plus our deep, industry-wide technical insight, provide drive performance calibrated for the real world, setting the pace not only in four-corner performance but in IO conditions found across a range of mainstream workloads.



Product (3.84TB)	Sequential Read 128KB	Sequential Write 128KB	Random Read 4KB	Random Write 4KB
<b>Solidigm™ D7-PS1010</b>	<b>1.04X</b> Up to 14.5 GB/s	<b>1.37X</b> Up to 8.2 GB/s	<b>1.24X</b> Up to 3.1M IOPS	<b>1.13X</b> Up to 315K IOPS
<b>Samsung PM1743</b> baseline	1.00X Up to 14 GB/s	1.00X Up to 6.0 GB/s	1.00X Up to 2.5M IOPS	1.00X Up to 280K IOPS
<b>Samsung PM9D3a</b>	0.86X Up to 12 GB/s	1.13X Up to 6.8 GB/s	0.84X Up to 2.1M IOPS	0.89X Up to 250K IOPS
<b>Kioxia CD8P-R</b>	0.86X Up to 12 GB/s	0.92X Up to 5.5 GB/s	0.76X Up to 1.9M IOPS	0.71X Up to 200K IOPS
<b>Kioxia CM7-R</b>	1.00X Up to 14 GB/s	1.13X Up to 6.75 GB/s	1.08X Up to 2.7M IOPS	1.11X Up to 310K IOPS
<b>Micron 9550</b>	1.00X Up to 14 GB/s	1.00X Up to 6.0 GB/s	1.16X Up to 2.9M IOPS	1.00X Up to 280K IOPS

## Optimized for Real-World Workloads

Going beyond four-corner performance, Solidigm uses its deep knowledge of customer workloads to optimize performance for real-world IO conditions found in workloads such as AI/ML, HPC, databases, general purpose servers, and more.

**High Performance Computing (HPC)** is the ability to process data and perform complex calculations at high speeds. Clusters are networked to data storage to capture, feed, and ingest that data to optimize performance output. With the Solidigm D7-PS1010, HPC runs up to 37% higher throughput compared to our previous generation drive.<sup>6</sup>

**General Purpose Servers (GPS)** support a range of workloads that span databases, email, unified communications, content delivery networks, and more. Due to the nature of these servers, throughput and latency in a mixed environment is highly valued. Compared to a competitor drive, the Solidigm D7-PS1010 accelerates 80/20 sequential/random read performance by up to 50% and reduces latency up to 33%.<sup>7</sup>

**Online Analytical Processing (OLAP)** databases help organizations process large amounts of data from multiple sources and categorize it to provide valuable insights for any business. Solidigm D7-PS1010 can run this process up to 15% faster compared to a similar manufacturer drive, and over double the speed compared to the previous generation Solidigm drive.<sup>8</sup>

**Cloud Compute Services** are utilized across a wide array of scenarios such as data backup, disaster recovery, databases, email, virtual desktop, and more. These usages present a highly random, mixed workload environment, which values low latency to improve experience. When deployed in an Online Transaction Processing (OLTP) environment, Solidigm D7-PS1010 delivers up to 65% better bandwidth compared to a competitor drives.<sup>9</sup> In server-based storage solutions, where VMs generate a mix of reads and writes that can be highly random or sequential, Solidigm D7-PS1010 will accelerate these workloads. Compared to similar drives from competition, the Solidigm D7-PS1010 can push these workloads to over 66% faster sequential write throughput.<sup>10</sup>


## AI Pipeline Workloads

The rapid growth of artificial intelligence has caused a boom in compute power. The worst thing you can do to your graphics processing unit (GPU) efficiency is to throttle performance with hard disk drive (HDD) limitations. Solidigm D7-PS1010 and D7-PS1030 placed in an all-flash performance tier helps overcome HDD performance, endurance, and reliability limitations.

Built to excel at every stage of the AI data pipeline, you can experience up to 50% higher throughput in certain pipeline phases, compared to similar drives by other manufacturers.<sup>11</sup>


Recommended use cases for the Solidigm D7-PS1010 and D7-PS1030 in AI data pipelines:

1. As **NVMe Data Cache Drive** in GPU servers
2. In **All-Flash High-Performing Tier** supporting lower-performing HDDs

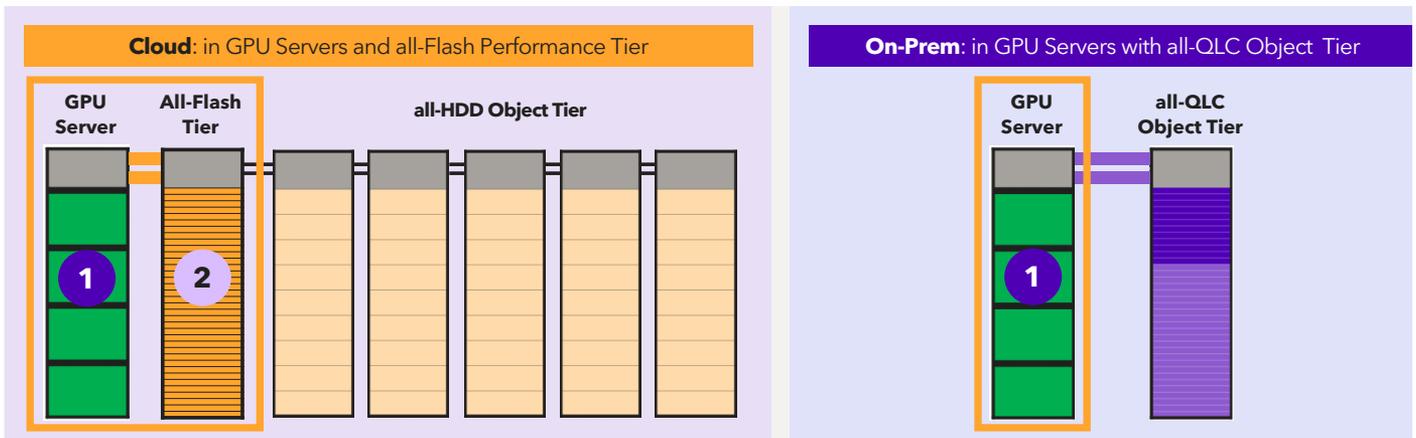

## Best-in-Class Energy Efficiency

Solidigm D7-PS1010 and D7-PS1030 improves operational efficiency without sacrificing performance, while delivering world-class consistency, quality, and reliability. With class-leading performance efficiency, Solidigm D7-PS1010 offers up to 70% better energy efficiency compared to similar drives by other manufacturers,<sup>12</sup> allowing for more efficient energy and operation. With five flexible power states ranging from 5W to 25W, you can control your power consumption to meet your workload needs.

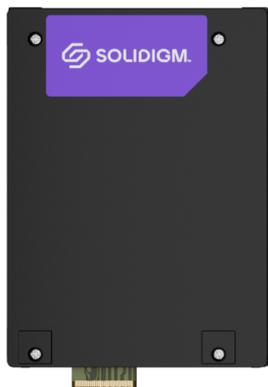

## Modern Security and Manageability Features on the Leading Protocols

Building on our previous generation PCIe 4.0 data center SSDs, the Solidigm D7-PS1010 and D7-PS1030 offer a broad feature set aligning with the industry’s most desired and essential requirements.

Performance Features			
	Feature	Solidigm™ D7-PS1010/PS1030	Customer Experience
Standards	NVMe Base Specification NVMe-MI Specification OCP Specification	NVMe v2.0 NVMe-MI v1.2 OCP v2.0r21	Compliant and/or certifiable with today’s predominant industry standard design and security, manageability protocols.
	TCG-OPAL	Version 2.02	
	FIPS 140-3 Level 2	Certifiable	
Security	Secure Boot & Firmware Sign	OCP Standard	Modern features to secure hardware and data at rest and in motion.
	Format NVM & Sanitize Erase (User/Block and Crypto)	NVMe Standard and IEEE 2883-2022	
	Device Attestation	DMTF SPDM 1.1.0	
Management	Out-of-Band NVMe-MI (Basic + MCTP)	SMBus + PCIe-VDM	In-band and side channel interface access to deliver maximum capability and flexibility for monitoring and control.
	In-Band NVMe-MI	Yes (All Mandatory)	
	Power Management	5 States	
	PCIe Rx Measurement (TP4119)	NVMe Standard	
	Firmware Activation History	OCP Standard	
	Configurable PLP Health Check	OCP Standard	
	Configurable EOL Management	OCP Standard	
Perf + Recovery	Weighted Round Robin	NVMe Standard	Capabilities for enhancing performance, logging and data recovery.
	Latency Monitoring	OCP Standard	
	Scatter Gather List	NVMe Standard	
	Persistent Event Log	NVMe Standard	
	Data Recovery (Device, System, Host)	OCP Standard	

## Deploy with Confidence

Solidigm D7-PS1010 and D7-PS1030 SSDs are designed and tested with an unwavering focus on quality, reliability, and performance consistency, so you can deploy them with the utmost confidence.

**Data Protection:** With enhanced PLI testing, an UBER rate tested to 1E-18 which is 100x beyond JEDEC specification,<sup>13</sup> and SDC testing that continues to lead the industry,<sup>14</sup> Solidigm has strengthened its legacy of reliability to help protect your data.

**Drive Reliability:** Continued proven reliability delivers AFR significantly better than JEDEC in high-volume manufacturing.<sup>15</sup> Margin-corner testing and robust RDT help the drives perform reliably when deployed in real-world conditions.

**Consistency:** Up to 90% IOPS consistency provides consistent performance over the life of the drive,<sup>16</sup> allowing the drive to meet workload requirements over the duration of the warranty.<sup>17</sup>

To learn more about how Solidigm D7-PS1010 and Solidigm D7-PS1030 drives can help you power your workloads, visit our value calculator at: [Solidigm.com](https://www.solidigm.com)





1. Comparing product specifications and measured real-life workload performance across widely shipping PCIe 5.0 data center SSDs at the industry's highest volume capacity point of 3.84TB (using Solidigm 2023 and 2024 shipments as industry representative data).
2. Solidigm technology, based on a combination of Intel® analysis and publicly available storage workload research material.
3. Solidigm drives are tested to 1E-18 under full range of conditions and cycle counts throughout the life of the drive which is 100X higher than 1E-16 specified in JEDEC – Solid State Drive Requirements and Endurance Test Method (JESD218). <https://www.jedec.org/standards-documents/focus/flash/solid-state-drives>
4. Refer to Solidigm™ D7-PS1010 product specifications for IOPS consistency. Solidigm expects up to 5% variation in throughput between drive-to-drive runs. IOPS variability measured after adjusting SSD cycle limit to simulate end of life behavior. Results are estimated or simulated. Actual results may vary.
5. As compared to previous generation Solidigm™ D7-P5520. See Solidigm D7-PS1010/PS1030 product specifications for performance, exceptions and modifications for compliance/support details.
6. Workload IO characteristics based on research of publicly available materials conducted by Solidigm. Comparing Solidigm D7-P5520 3.84TB (2.63GB/s) and Solidigm D7-PS1010 3.84TB (3.61GB/s). System Configuration: System Config 1, 2, see Appendix for config details. IO measured using FIO tool.
7. Workload IO characteristics based on research of publicly available materials conducted by Solidigm. Solidigm D7-PS1010 3.84TB (13.50GB/s 152us) and Samsung PM1743 3.84TB (9.03GB/s 228us).
8. Workload IO characteristics based on research of publicly available materials conducted by Solidigm. Comparing Solidigm D7-P5520 3.84TB (1M Seq. 70R/30W QD32 5.39GB/s), Solidigm D7-PS1010 3.84TB (1M Seq. 70R/30W QD32 11.49GB/s) and Samsung PM1743 3.84TB (1M Seq. 70R/30W QD32 9.94GB/s). System Configuration: System Config 1 and System Config 2, see Appendix for config details. IO measured using FIO tool.
9. Workload IO characteristics based on research of publicly available materials conducted by Solidigm. Comparing Solidigm D7-PS1010 7.68TB (8KB RND 70/30 R/W QD128 3.82GB/s 339us), Samsung PM1743 7.68TB (8KB RND 70/30 R/W QD128 2.32GB/s 934us). System Configuration: System Config 3, see Appendix for config details. IO measured using FIO tool.
10. Workload IO characteristics based on research of publicly available materials conducted by Solidigm. Comparing Solidigm D7-PS1010 7.68TB (128KB Seq Write QD128 10.2 MB/s) vs Samsung PM1743 7.68TB (128KB Seq Write QD128 6.13 MB/s). System Configuration: System Config 3, see Appendix for config details. IO measured using FIO tool.
11. Workload IO characteristics based on research of publicly available materials conducted by Solidigm. Solidigm D7-PS1010 7.68TB (32KB SW QD32 9.03GB/s 113us) vs Samsung PM1743 7.68TB (32K SW QD32 6.03GB/s 170us) System Configuration: System Config 1 and 3, see Appendix for config details. IO measured using FIO tool.
12. Comparing 7.68TB, Samsung PM1743 and Solidigm D7-PS1010. Power is measured using Quarch Technology. D7-PS1010 (128KB SW QD128 IOPS/Watt 3,874), Samsung PM1743 (128KB SW QD128 IOPS/Watt 2,272). System Configuration: System Config 3, see Appendix for config details. Throughput measured using FIO tool.
13. Solidigm drives are tested to 1E-18 under full range of conditions and cycle counts throughout the life of the drive which is 100X higher than 1E-16 specified in JEDEC – Solid State Drive Requirements and Endurance Test Method (JESD218). <https://www.jedec.org/standards-documents/focus/flash/solid-state-drives>
14. Typical Reliability Demonstration Test involve 1K drives for 1K hours to levels down to 1E-18. Solidigm drives are tested at the neutron source at Los Alamos National Labs to measure SDC susceptibility to 1E-23 with modeling to 1E-25. In 3 generations of testing at Los Alamos, equivalent to over 5M years of operational use, zero SDC errors have been detected on Solidigm drives and no evidence of other suppliers testing at the facility has been observed.
15. Solidigm™ D7-PS1010 AFR data from device validation.
16. Refer to Solidigm™ D7-PS1010 product spec for IOPS consistency. IOPS variability measured after adjusting SSD cycle limit to simulate end of life behavior. Results are estimated or simulated. Actual results may vary.
17. Solidigm Warranty Policy can be found here: <https://www.solidigm.com/support-page/warranty-rma.html>

Comparison data is based on publicly available information. Products mentioned include:

- [Samsung PM1743](#)
- [Samsung PM9D3a](#)
- [Kioxia CD8P-R](#)
- [Kioxia CM7-R](#)
- [Micron 9550](#)

Appendix: System Configuration

System config 1: Server: Intel® Server System M50CYP, Mainboard: Intel® Server Board M50CYP2SB2U, Version: S2W3SIL4B; BIOS: SE5C6200.86B.4018.D65.2010201151; CPU: Intel® ICE LAKE - P5 4GXRAV D, CPU Sockets: 2, Number of Cores: 36; DRAM: DDR4 64GB, Linux Release 7.5.1804, Kernel version: 3.10.0-862.el7.x86\_64 used for Solidigm D7-P5220

System Config 2: Server: Dell Power Edge, Mainboard: 095DFK, BIOS: A03, CPU: Intel® Xeon® Gold 6426Y, CPU Sockets 2, Cores: 32, DDR5 64GB, OS: Kernel version: 3.10.0-862.el7.x86\_64 Used for Samsung PM1743/Solidigm D7-PS1010

System Config 3: Server: SuperMicro ASG-2115S-NE332R, Mainboard: Super H13SSF, BIOS: 5.27, CPU: AMD EPYC 9374F, CPU Sockets 1, Cores: 32, DDR5 128GB, OS: Kernel version: 3.10.0-862.el7.x86\_64, Storage interface: E3.S AI Data Pipeline

System Config 4: Server: SuperMicro AS -2015CS-TNR, Mainboard: Super H13SSW, BIOS: 5.27, CPU: AMD EPYC 9374F, CPU Sockets 1, Cores: 32, DDR5 128GB, OS: Kernel version: 3.10.0-862.el7.x86\_64, Storage interface: U.2 Kioxia CM7-R

System Config 5: Server: Inventec-G225-B6, Mainboard: XiangyangMLB, BIOS: 5.27, CPU: AMD EPYC 9Y24, CPU Sockets 2, Cores: 96, DDR5 128GB, OS: Kernel version: 3.10.0-862.el7.x86\_64, Storage interface: U.2 Samsung PM9D3a

Power Measurements:

System Config 3: Server: SuperMicro ASG-2115S-NE332R, Mainboard: Super H13SSF, BIOS: 5.27, CPU: AMD EPYC 9374F, CPU Sockets 1, Cores: 32, DDR5 128GB, OS: Kernel version: 3.10.0-862.el7.x86\_64, Storage interface: E3.S D7-PS1010, Samsung PM1743 and Kioxia CM7-R

System Config 5: Server: Inventec-G225-B6, Mainboard: XiangyangMLB, BIOS: 5.27, CPU: AMD EPYC 9Y24, CPU Sockets 2, Cores: 96, DDR5 128GB, OS: Kernel version: 3.10.0-862.el7.x86\_64, Storage interface: U.2 Samsung PM9D3a

All information provided is subject to change at any time, without notice. Solidigm™ may make changes to manufacturing life cycle, specifications, and product descriptions at any time, without notice. The information herein is provided “as-is” and Solidigm does not make any representations or warranties whatsoever regarding accuracy of the information, nor on the product features, availability, functionality, or compatibility of the products listed. Please contact system vendor for more information on specific products or systems.

Performance results are based on testing as of dates shown in configurations and may not reflect all publicly available updates. See backup for configuration details. No product or component can be absolutely secure.

Performance varies by use, configuration and other factors.

Refer to the spec sheet for formal definitions of product properties and features.

Solidigm technologies may require enabled hardware, software or service activation. No product or component can be absolutely secure. Your costs and results may vary. Performance varies by use, configuration and other factors. Other names and brands may be claimed as property of others. Solidigm is committed to respecting human rights and avoiding complicity in human rights abuses. Solidigm products and software are intended only to be used in applications that do not cause or contribute to a violation of an internationally recognized human right.

Solidigm and the Solidigm logo are trademarks of Solidigm. All other trademarks are the property of their respective owners.

© Solidigm 2024. All rights reserved.